
GestorPDV - Falha de comunicação/conexão - [Check list]


Serve tanto para sincdata, gestores e gestorpdv.

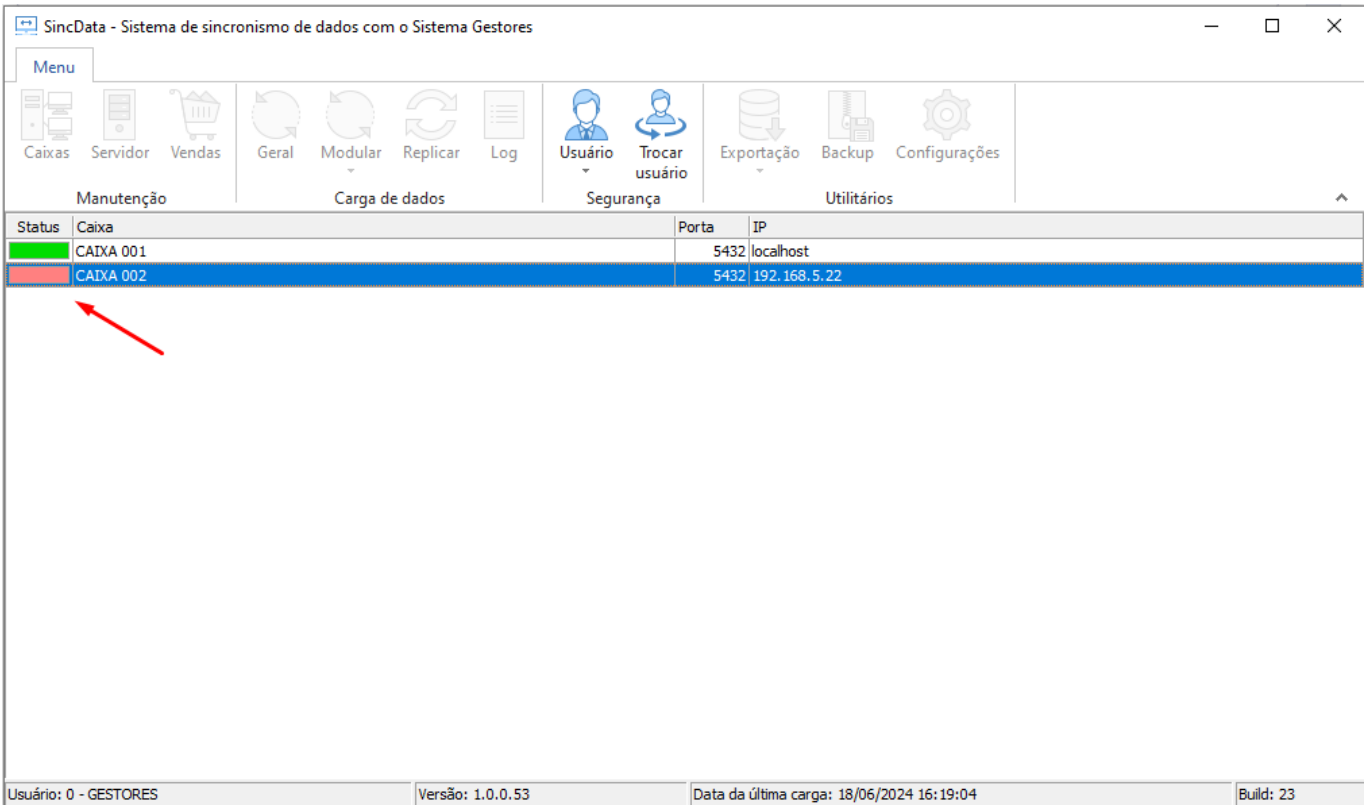

1.Ping nos computadores do sincdata para PDV e PDV para Sincdata.

Fazer o ping nas duas direções


© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39

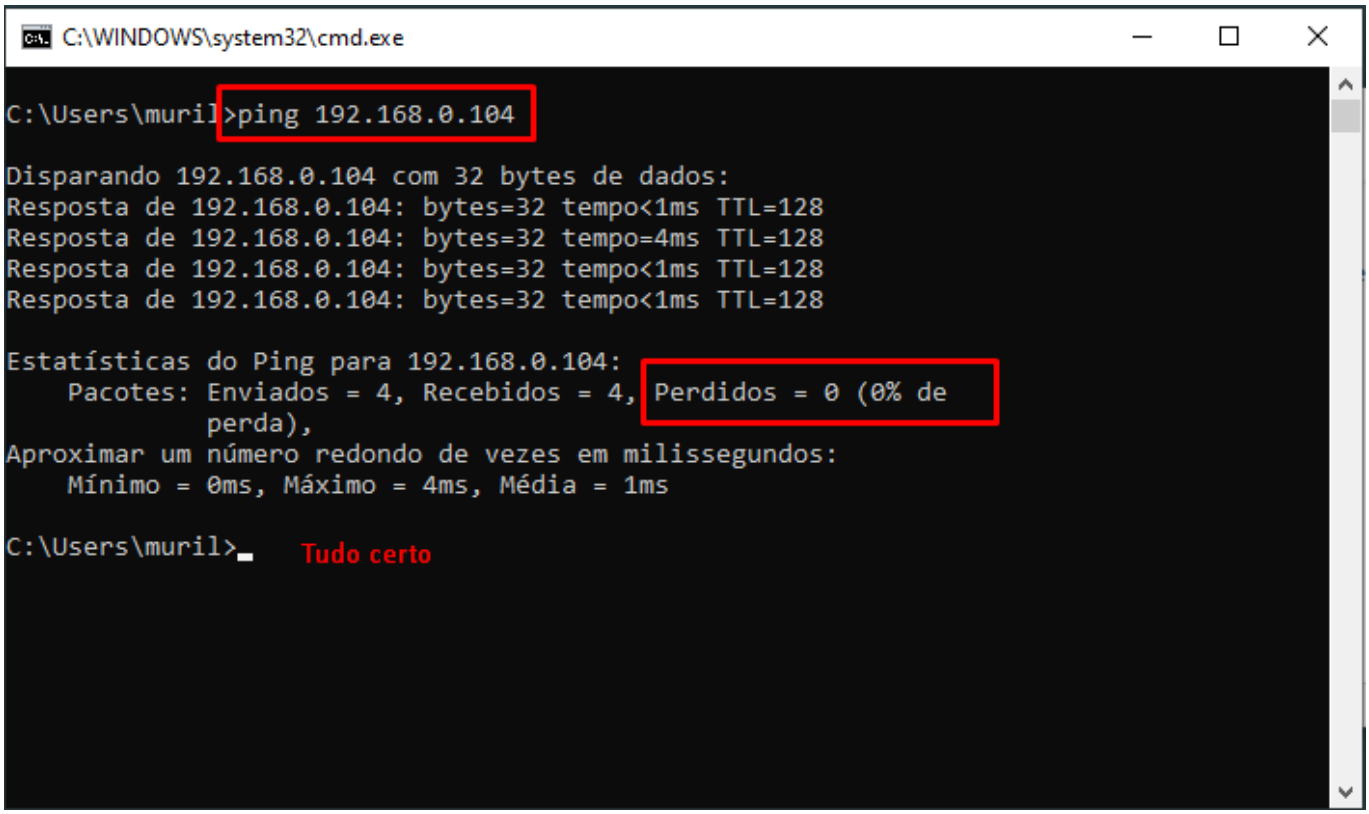

.

2.Liberação de portas do firewall


Liberar porta 5432 ou a quele que configurado.
Pode usar o arquivo .bat de liberar porta. (Core desk -> instalação necessario -> liberação de porta)

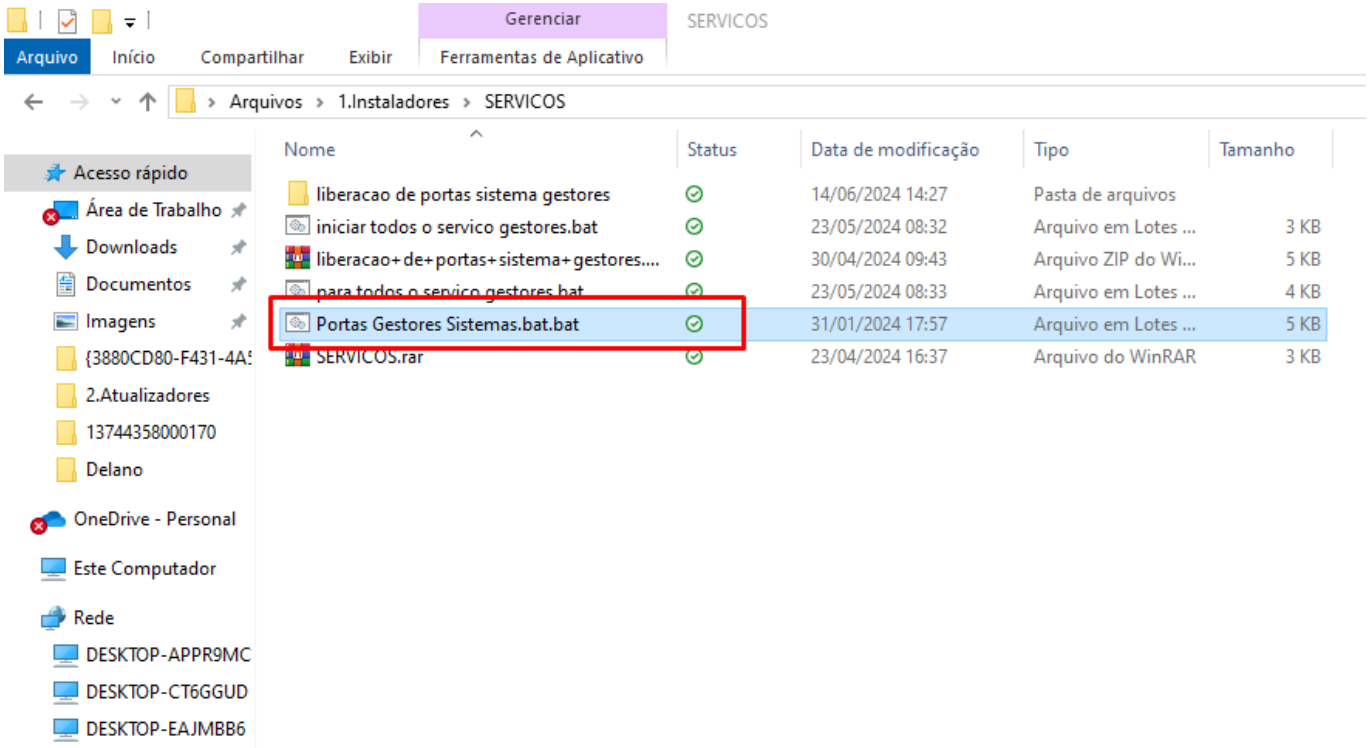

© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39
URL: https://faq.eadbrajan.com.br/content/60/287/pt_br/gestorpdv-_-falha-de-comunicação_conexão-_-check-list.html

3.Verificar serviço do postgre


Reiniciar serviço do portgre

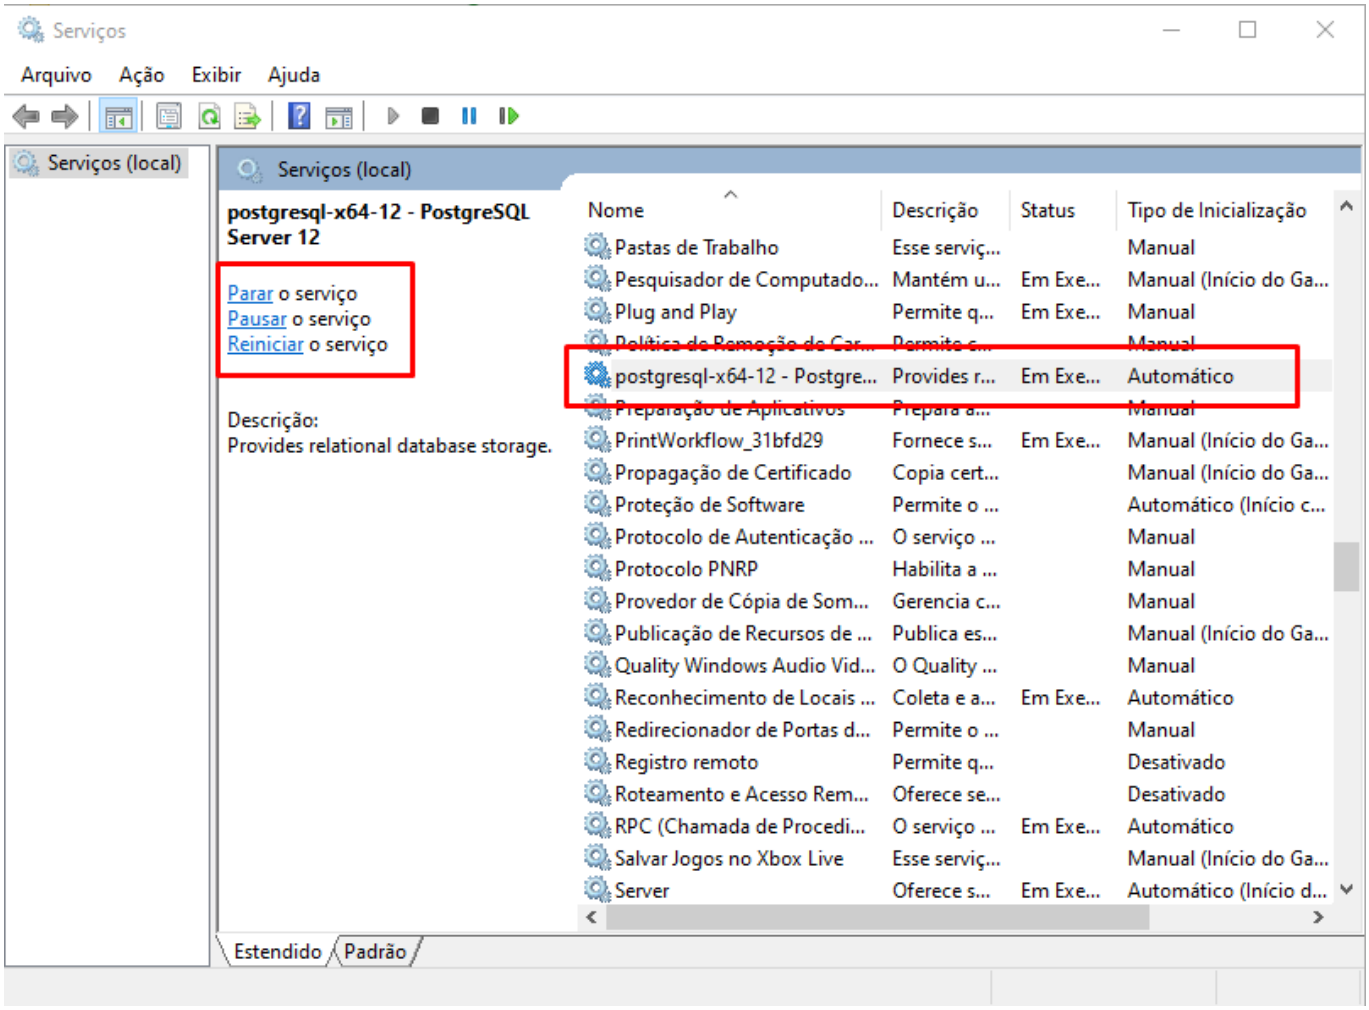

4.Verificar configurações de rede e compartilhamento


De permissões de compartilhamento

© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39

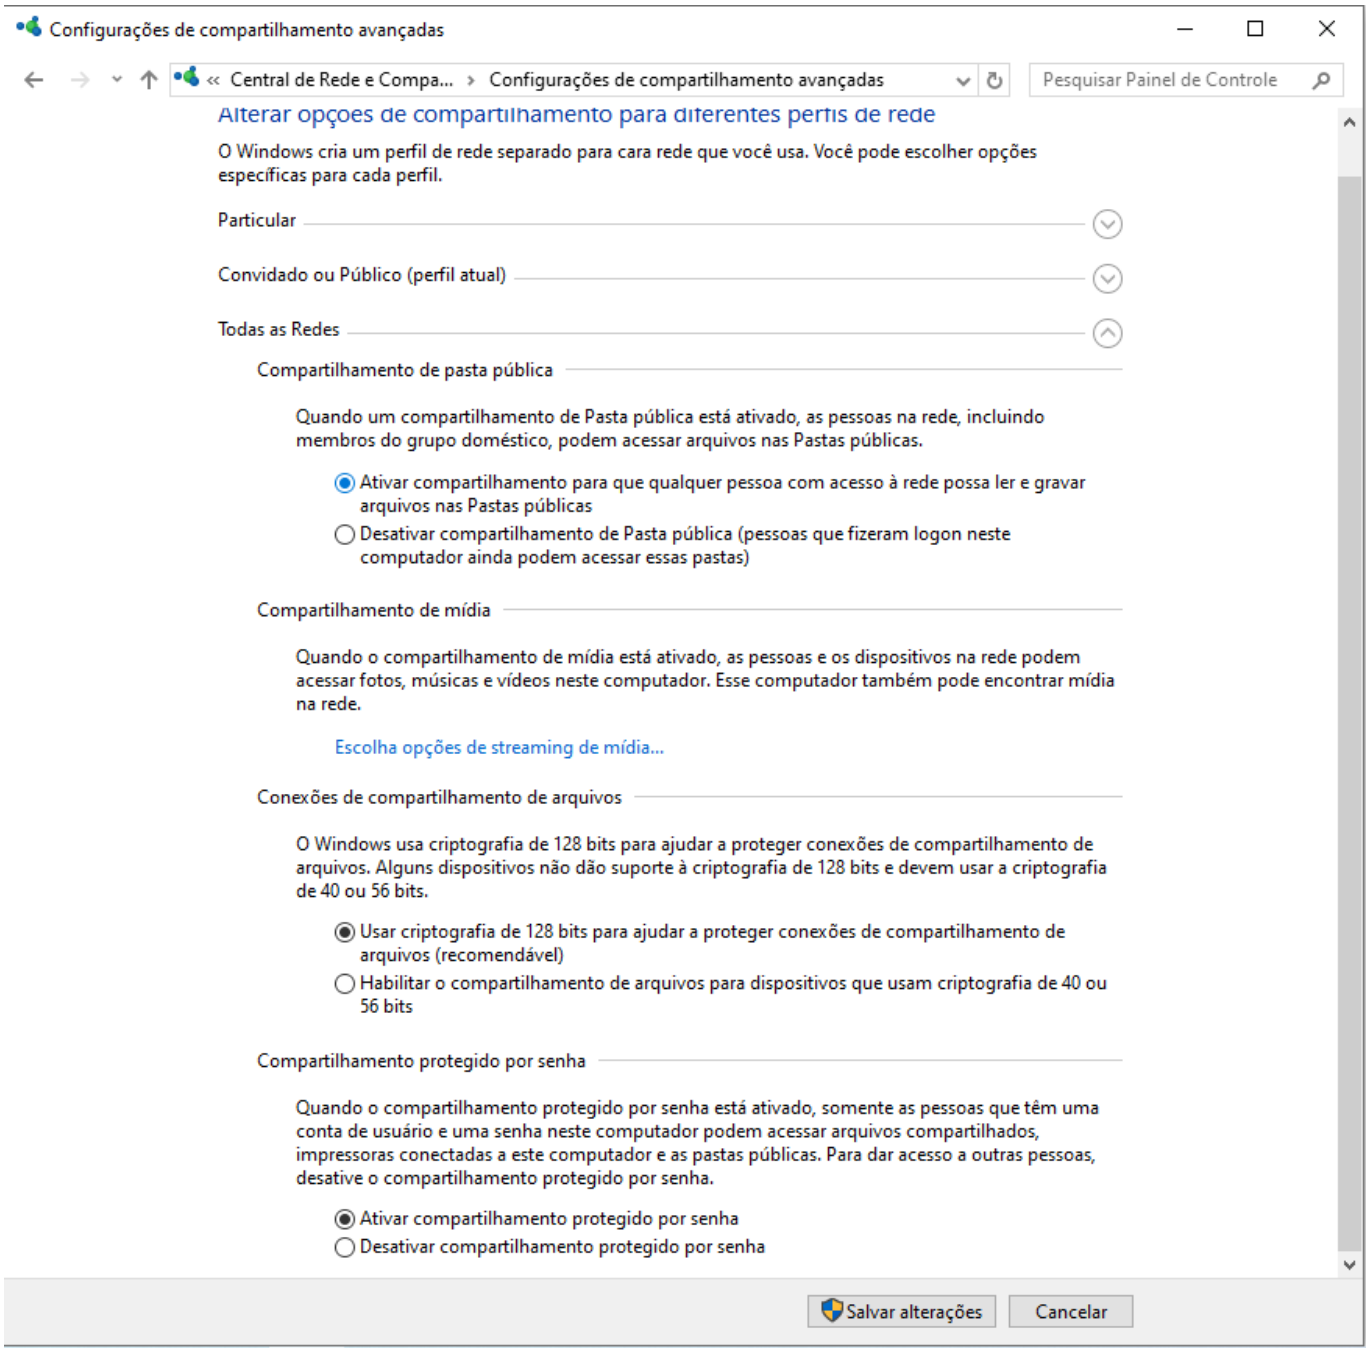

© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39


URL: https://faq.eadbrajan.com.br/content/60/287/pt_br/gestorpdv-_-falha-de-comunicação_conexão-_-check-list.html

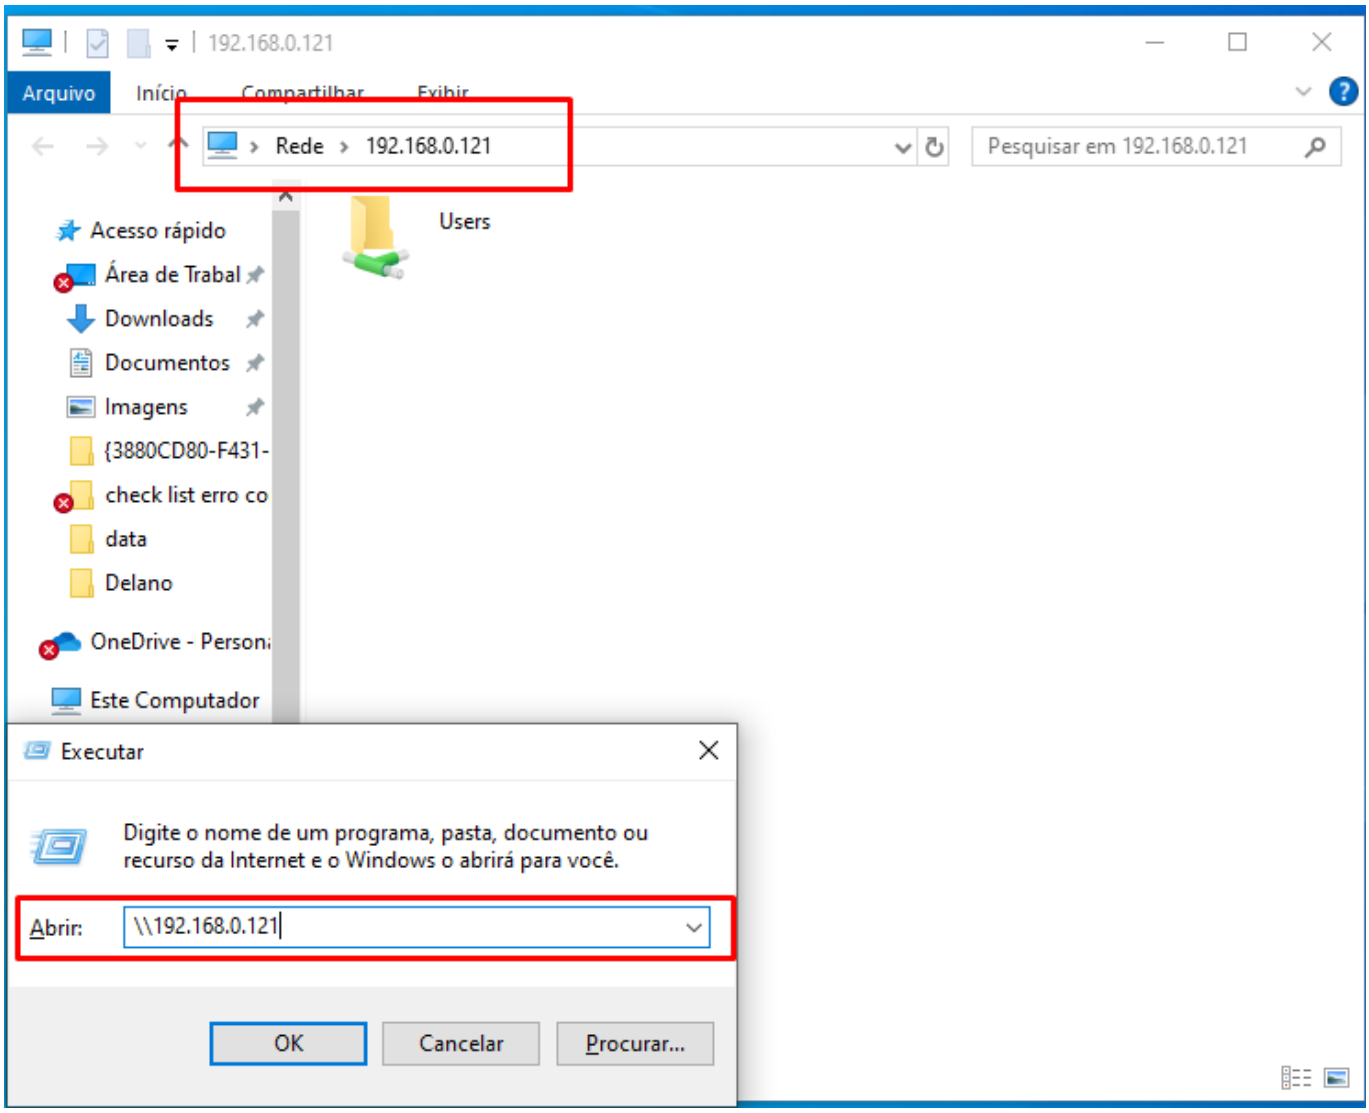

5.Permissão de compartilhamento na pasta Postgres das maquinas

Dar permissão C:\Program Files\PostgreSQL


© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39

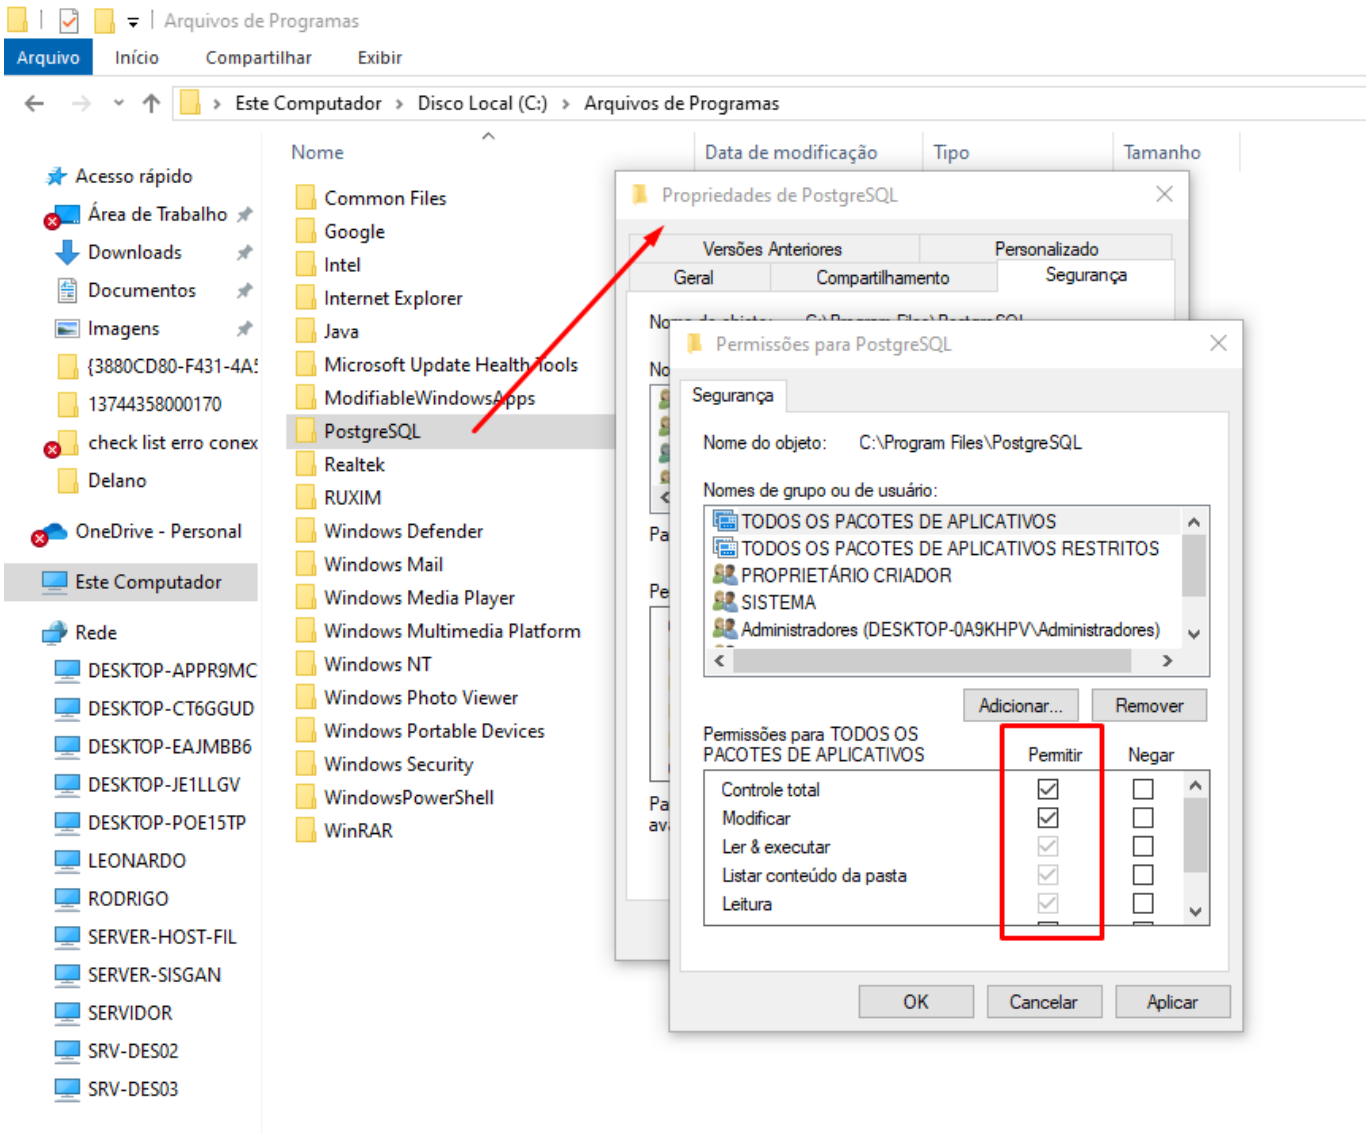

6.Instalar o AIO

(Core desk -> instalação necessario -> AIO)

© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39
URL: https://faq.eadbrajan.com.br/content/60/287/pt_br/gestorpdv-_-falha-de-comunicação_conexão-_-check-list.html

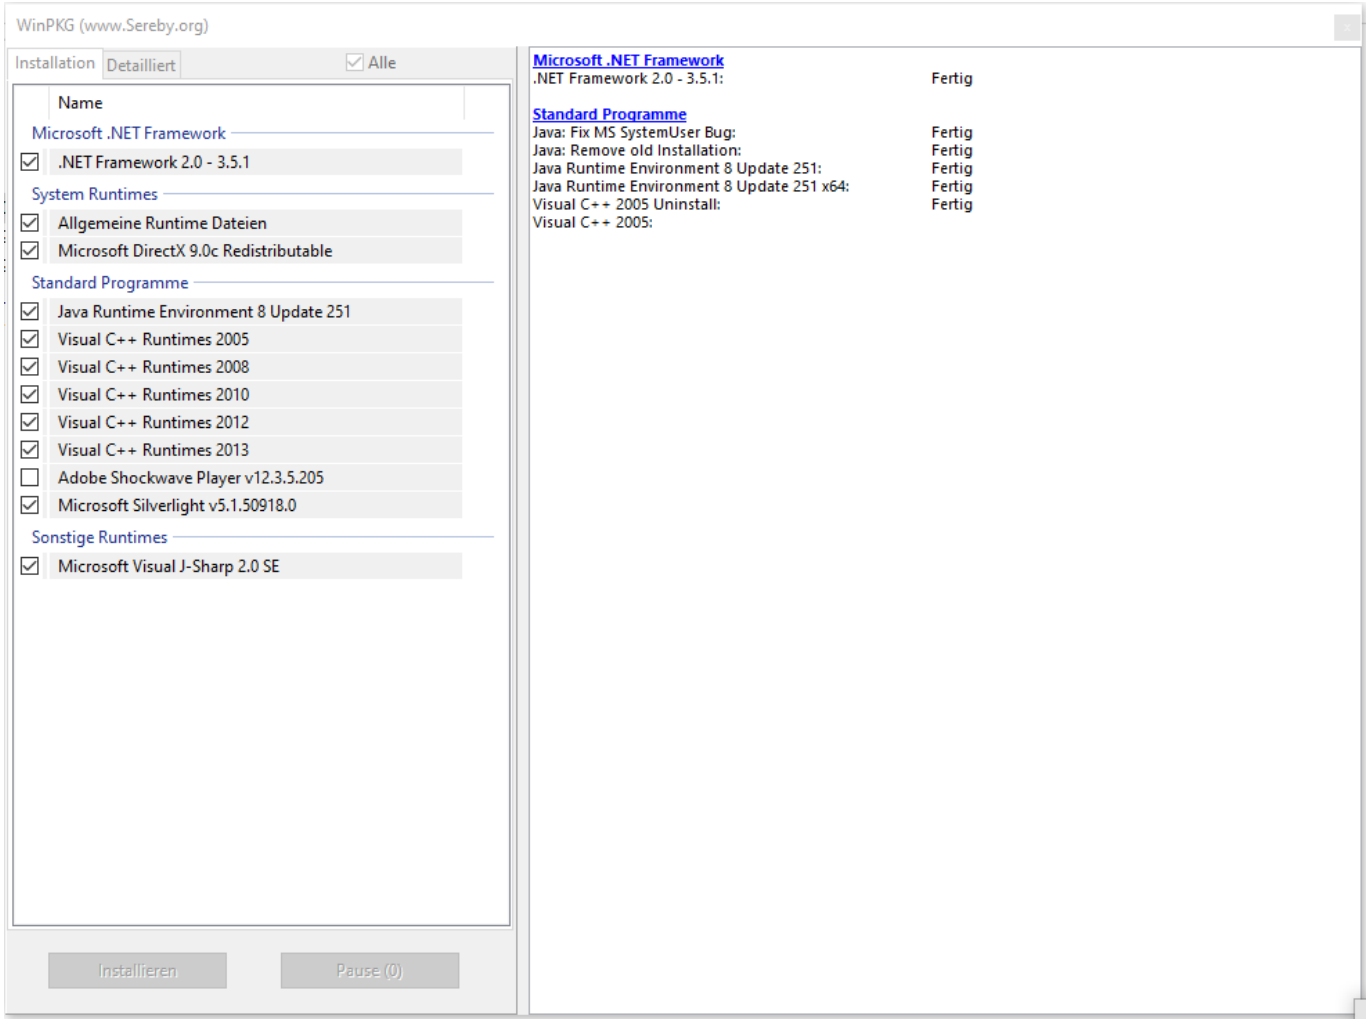

7. Configuração Pghba

colocar a linha do pghba - https://eadbrajan.com.br/course/view.php?id=150

host all all [Endereço que quer liberar para acessar a maquina]/32 md5

ex.: host all all 192.168.0.121/32 md5

© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39

```
# ----------------------------------
#
# If you want to allow non-local connections, you need to add more
# "host" records.  In that case you will also need to make PostgreSQL
# listen on a non-local interface via the listen_addresses
# configuration parameter, or via the -i or -h command line switches.


# TYPE  DATABASE        USER            ADDRESS                 METHOD

# IPv4 local connections:

#host    all             all             127.0.0.1/32            md5
host     all             all             192.168.0.121/32        md5

# IPv6 local connections:
host    all             all             ::1/128                 md5
# Allow replication connections from localhost, by a user with the
# replication privilege.
#host    replication     postgres        127.0.0.1/32            md5
#host    replication     postgres        ::1/128                 md5
```

ID de solução único: #1286
Autor:: MURILO
Última atualização: 02-11-26 13:09

© 2026 Ricardo De Souza Carvalho <ricardo@brajan.com.br> | 10-31-26 08:39